



Duproof

Waterproofing expert

**WATERPROOFING
&
CONSTRUCTION
PRODUCTS**

DUPROOF  **دوبروف**

PRODUCT
CATALOG

www.duproof.ae



INDEX

20+

Years of

Delivering
Building
Waterproofing
Solutions



1. **Chairperson Message**
2. **CEO Profile**
3. **Introduction**
4. **Quality Policy and Certificates**
5. **Products Range**
6. **Waterproofing Membrane**
7. **Liquid Coatings**
8. **Special Product**
9. **Mega Projects**



Chairperson Message



Ohood Al Mutaiwei
Chairperson

As the Chairperson of the company, it is both an honor and a privilege to lead a team of dedicated professionals who are the driving force behind our continued success. As we embark on a journey of growth, innovation, and success at Duproof LLC

At Duproof we believe in the power of excellence, collaboration, and a relentless pursuit of innovation. Our commitment to delivering outstanding products/services and creating lasting value for our clients has been the cornerstone of our success over the years.

As we navigate through the dynamic landscape of the manufacturing industry our focus remains steadfast on adapting to change, embracing emerging technologies, and fostering a culture of continuous improvement. We recognize that our people are our greatest asset, and together, we will build on our legacy of achievements while exploring new horizons.

Regards



CEO PROFILE



Dr, Shadi AlJamal
CEO

He is the Chief Executive Officer at Duproof LLC, leveraging over 17 years of professional experience. His accomplishments and qualifications encompass expertise in IFRS, Value Added Tax, and Audit Risk Management. Holding a master's degree in economics and a doctorate in Business Administration from the United Kingdom, he brings a wealth of academic and practical knowledge to his role.

Within Duproof, he shoulders diverse responsibilities, encompassing the oversight of cash flow, financial planning, and the analysis of the company's financial landscape. His role extends to proposing and implementing corrective measures to address identified strengths and weaknesses. He bears the overarching responsibility for future vision, mission, business planning, budgeting, and forecasting.

Furthermore, he manages crucial tasks related to investor relations and partnership compliance, ensuring alignment with present and future objectives.



INTRODUCTION

Duproof LLC is a manufacturing company established in 2002 which specialized in producing complete range of waterproofing and damp proofing materials used in the construction industry. Our factory is in Dubai Investment Park 1, Dubai, U.A.E. We are one of the largest manufacturers of waterproofing materials in this area and our production capacity is 8 million square meter per annum. Our products are produced with the latest state of the art technology under strict quality control supervision. We have a well-known proven European technical knowhow that has a long history and market leadership for more than 100 years in the field of manufacturing bitumen based waterproofing materials.

Our products cater to a wide range of structural engineering applications like basement, wet areas (i.e., toilets, bathrooms, kitchens, pantries, balconies, etc.), Roofs, building facades, landscape areas, etc.





Duproof LLC is committed to manufacture high quality of water proofing products efficiently and competitively"

We are committed to comply with all regulatory and statutory requirements and develop employees to utilize capabilities to the full extent by fostering a spirit of innovation with empowerment.

Duproof LLC is committed to continual improvement in all aspects of Quality Management System to provide a product assurance backed by quality standards and actions to address the risk and opportunities at each step to achieve customer satisfaction and keep up with our long years of trust and confidence.

Achieve our goal through excellence in every activity, so that we will be recognized as a preferred supplier by all our esteemed customer.

We strive to achieve this by :

- ★ Maintaining our high level of integrity and technical expertise.
- ★ Fostering teamwork and employee empowerment.
- ★ Continually improving our management system including our workforce, processes and products.
- ★ Providing our valued customers with high quality products.
- ★ Satisfying our customers' expectations.
- ★ The system of measuring the effectiveness of the Quality Management System through internal audit is being implemented.
- ★ Regular Management Review Meeting (MRM) is being conducted to ensure the effectiveness of the Factory's Quality Management System.
- ★ There is system in place to identify the root cause and provision of corrective and preventive actions (CA&PA), whenever there is risk and deviation from our set quality objectives.



DUPROOF PRODUCTS RANGE

APP MEMBRANE

SBS MEMBRANE

ANTI-ROOT MEMBRANE

SELF-ADHESIVE MEMBRANE

PROTECTION BOARD

DAMP PROOF COURSE

SELF-ADHESIVE PIPE WRAPPING TAPE

SOLVENT BASE LIQUIDS

WATER BASE LIQUIDS

DUCOAT RBE

HOT APPLIED COATING

ACRYLIC COATING

ALUMINUM FLASHING

PVC WATER STOPPER

HYDROPHILIC RUBBER WATERSTOP

DUINJECT HOSE

DUFIBREBOARD (FLEXEL SHEET)

CEMENTITIOUS COATING

CEMENTITIOUS FAIR COAT

FREE FLOW GROUT

MICRO-CONCRETE

FIBRE REINFORCED REPAIR MORTAR

WATER RESISTANT TILE ADHESIVE

POLYMER MODIFIED TILE ADHESIVE

LATEX MODIFIED TILE ADHESIVE

EPOXY GROUTING

EPOXY RESIN ADHESIVE

EPOXY FLOOR COATING

PILE HEAD EPOXY GROUT

MOULD RELEASE AGENT - S & WB

PVA & SBR BONDING AGENT

Curing Compound.

POLYURETHANE

MASTIC SEALANT



WATERPROOFING MEMBRANE

APP MEMBRANE:

APP (DUPLAS) modified bituminous torch applied waterproofing membrane with Polyester or Glass Fiber reinforcement, obtain a excellent performance cost effective for a wide range of areas.

Component APP	Reinforced Glass Fiber	Reinforced Polyester
Roll Size	1mtr x 10mtr	1mtr x 10mtr
Thickness (mm)	2, 3, and 4 mm	3, 4 and 5 mm
Reinforcement	50/60 GSM	140/160/180/200/ 250/270 GSM
Upper Surface	PE Film, Sand, Slate Aluminium Foil	PE Film, Sand, Slate Aluminium Foil
Lower Surface	PE Film	PE Film

- DUPLAS P
- DUPLAS HP
- DUPLAS G
- DUPLAS AG




SBS MEMBRANE:

SBS (DULAS) modified bituminous torch applied waterproofing membrane with Polyester or Glass Fiber reinforcement obtain a excellent performance and used where a flexible high quality waterproofing system is needed.

Component SBS	Reinforced Glass Fiber	Reinforced Polyester
Roll Size	1mtr x 10mtr	1mtr x 10mtr
Thickness (mm)	2, 3, and 4 mm	3, 4 and 5 mm
Reinforcement	50/60 GSM	140/160/180/200/ 250/270 GSM
Upper Surface	PE Film, Sand, Slate Aluminium Foil	PE Film, Sand, Slate Aluminium Foil
Lower Surface	PE Film	PE Film


- DULAS P
- DULAS HP
- DULAS G
- DULAS AG

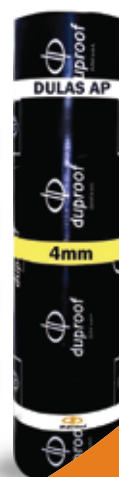

ANTI-ROOT MEMBRANE

DUPROOF ANTI-ROOT MEMBRANE is an excellent membrane available in APP or SBS modified bitumen waterproofing sheet with a special compound to prevent the root penetration. Both membrane are absolutely root proof and widely used in green roof systems. The topside is covered with a special foil or sand or slate and the bottom layer with a polymeric foil.

Component APP or SBS	Reinforced Polyester
Roll Size	1mtr x 10mtr
Thickness (mm)	3, 4 and 5 mm
Reinforcement	180/200/ 250/270 GSM
Upper Surface	PE Film, Sand, Slate or Aluminium Foil
Lower Surface	PE Film

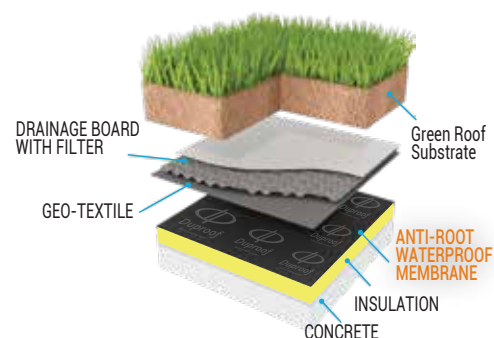

SELF-ADHESIVE MEMBRANE

DUSEAL is a high quality self-adhesive SBS modified waterproofing membrane sheet reinforced with root proof reinforcement to enhance the dimensional stability. The self-adhesive bottom surface is laminated with Siliconized release foil or paper and the top surface of the membrane is laminated with a cross laminated special multi-layer polymeric foil. It is used for a variety of waterproofing and damp proofing applications where the requirements are rigorous.

Component SBS	Reinforced Glass Fiber	Reinforced Polyester
Roll Size	1mtr x 10mtr, 1mtr x 15mtr, 1mtr x 20mtr	
Thickness (mm)	1.5, 1.6, 1.8, 2, 2.1 & 3mm	
Reinforcement	50GSM	100/120/150/160 180GSM
Upper Surface	PE Film, Aluminium Foil, CXL Film	
Lower Surface	Release film	



SELF-ADHESIVE DOUBLE SIDE

DUSEAL TH is a special Double sided self-adhesive SBS modified water-proofing membrane specially designed where a subsequent layer (e.g. thermal insulation on building facades) needs to be applied over the membrane.


Component SBS	Reinforced Glass Fiber or Polyester
Roll Size	1mtr x 10mtr, 1mtr x 15mtr, 1mtr x 20mtr
Thickness (mm)	1.5 & 2 mm
Reinforcement	50 & 100GSM
Upper Surface	Release film
Lower Surface	Release film



PROTECTION BOARD

DUBOARD is a high quality, semi flexible bituminous board for use as protection course to waterproofing against long term exposure, backfill and damage caused by construction traffic, concreting and other subsequent works. DUBOARD is produced with a mix of bitumen compounds, stabilizers and modifiers and strengthened with a rot proof fabric reinforcement, providing superior puncture resistance and low deflection coefficient while maintaining a sufficient degree of flexibility to accommodate normal site usage.

Component APP	Reinforced Glass Fiber	Reinforced Polyester
Sheet Size	1mtr x 2mtr	
Thickness (mm)	3, 3.2, 3.5 & 4 mm	3, 3.2, 3.5, 4 & 6mm
Reinforcement	50GSM	120/140/160/180/ 200/250GSM
Upper Surface	PE Film or Sand	
Lower Surface	PE Film	

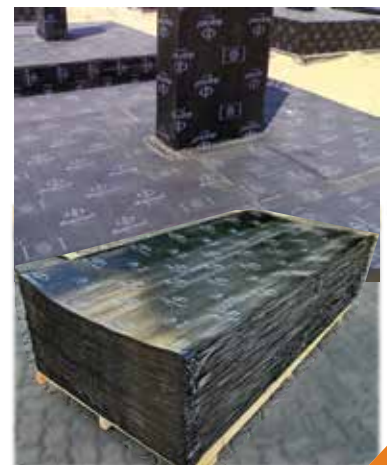

DPC (DAMP PROOF COURSE) ROLL



DAMP GUARD is durable, high performance; elastomer damp proof membrane designed using polymer modified bitumen coated on to a tough fiber base, laminated with special polyolefin foil. The elastomer nature of the synthetically modified coating is designed as a homogeneous mixture of special bitumen and selected quality type SBS elastomer, which ensures high product quality and superior performance with excellent flexibility in cold climatic conditions.

Component SBS	Reinforced Glass Fiber or Polyester
Length	10 mtr
Width	100, 150, 200, 250, 300, 500 & 1000mm
Thickness (mm)	1.5, 3mm & 4mm
Upper Surface	PE film or Sand
Lower Surface	PE film



DUWRAP

DUWRAP is a general purpose self-adhesive pipe wrapping tape designed for corrosion protection of pipelines and various metal surfaces in small and large industries.

DUWRAP SP is a specially made durable, high performance, damp proof membrane designed using polymer modified bitumen with fiber base laminated with special aluminum sheet and covered with polyolefin foil to comply with BS 6398: 1983 (Class E).

Component SBS	Reinforced Glass Fiber or Polyester
Length	15 mtr
Width	100, 150, 200, 250, 300 & 500mm
Thickness (mm)	1.5, 1.8 & 2mm



DUTAPE



DUTAPE is a special double sided self-adhesive general purpose tape. It is composed of SBS modified bitumen. A silicon coated release film covers both faces.

Thickness (mm)	1.5mm
Length	15 mtr
Width	100, 150, 200, 250, 300 & 500mm



LIQUIDS

SOLVENT BASE LIQUIDS

1. DUPRIME

DUPRIME is an excellent quality universal primer, manufactured from a special type of bitumen. It is solvent based and commonly applied onto various substrates (concrete, concrete blocks, bricks, foam concrete, and steel substrates) to improve bonding of bituminous products. DUPRIME is in accordance with ASTM D 41.



Packing

20L

200L

2. DUSEEL R300

DUSEEL R300 is a superior quality elastomer, liquid applied bitumen membrane blended with special ingredients. It is solvent based with special SBS rubber for high-quality performance and durability. The elastomer liquid applied membrane forms upon drying a tough elastic, flexible coating capable to withstand structural movements and moisture penetration.



Packing

20L

3. DUSEEL A 300

DUSEEL A 300 is a special solvent-based liquid applied aluminum bitumen protective and reflective coating. The special mixture of high quality bitumen and petroleum solvent is blended with a special aluminum paste for high reflectivity and outstanding protection against UV rays. The liquid applied material is highly versatile and it serves as both a protective and an insulation coating for various structures and roofing systems. This product meets the requirements of ASTM D 2824.



Packing

20L

SOLVENT BASE LIQUIDS



4. DUSEEL 300

DUSEEL 300 is a superior quality, general-purpose bitumen protective coating blended with special Bitumen and Petroleum solvents. It is solvent based with high performance and durability.

Packing	20L
---------	-----

WATER BASE LIQUIDS

1. DUPRIME E

DUPRIME E is a high-quality environment friendly water based bituminous anionic emulsion primer. It is free of solvent and exhibits excellent adhesion property. It is applied onto various substrates (concrete, concrete blocks, bricks, foam concrete fiber and cement board) to improve bonding of bituminous products.

Packing	20L	200L
---------	-----	------



2. DUCOAT R 1000

DUCOAT R 1000 is an outstanding rubberized, thixotropic, anionic bitumen emulsion. The elastomeric property (due to 20% Rubber on dried film) of the liquid applied waterproofing membrane provides high flexibility and elasticity of the product to withstand high movements of the substrate due to changing temperatures. The product is thixotropic in nature that makes it ideal for Protective coating applications on vertical structures.

Packing	20L	200L
---------	-----	------



3. DUCOAT R 65

DUCOAT R 65 is an outstanding rubberized, elastomer, ready to use anionic bitumen emulsion. The elastomer property of the liquid applied waterproofing membrane provides high flexibility and elasticity of the product to withstand high movements of the substrate due to changing temperatures.

Packing	20L	200L
---------	-----	------



WATER BASE LIQUIDS



4. DUCOAT F 100

DUCOAT F 100 is thick emulsified anionic bitumen protective coating manufactured from high quality bitumen reinforced with superior type fiber. The special high quality product gives excellent adhesion to concrete and metal surfaces and forms a tough film upon drying.

Packing	20L	200L
---------	-----	------



5. DUSEEL R

DUSEEL R is a high quality, quick curing bitumen emulsion protective coating manufactured from the combination of high quality bitumen and chemical emulsifying agent. The rubber content (10% rubber on dried Film) gives the emulsion a strong consistency that forms upon drying an elastic and highly effective liquid applied protective coating membrane.

Packing	20L	200L
---------	-----	------



6. DUCOAT R 100 or DUCOAT RBE

DUCOAT R 100 or DUCOAT RBE is a rubberized, elastomeric, thixotropic, ready to use anionic bitumen emulsion. The elastomer property (due to 10% Rubber on dried film) of the liquid applied waterproofing membrane provides high flexibility and elasticity of the product to withstand high movements of the substrate due to changing temperatures. The product is thixotropic in nature that makes it ideal for protective coating applications on vertical structures.

Packing	20L	200L
---------	-----	------



7. DUSEEL 200

DUSEEL 200 is cold applied emulsified bitumen anionic protective coating manufactured from high quality bitumen and a special chemical emulsifier. The special high quality product gives excellent adhesion to concrete and forms a waterproofing barrier on the structure.

Packing	20L	200L
---------	-----	------



WATER BASE LIQUIDS

8. DUSEEL R 200 H

DUSEEL R 200 H is a high quality, quick setting bitumen emulsion protective coating manufactured from the combination of high quality bitumen, rubber and chemical emulsifying agent. The rubber content gives the emulsion a strong consistency that forms upon drying, elastic and highly effective liquid applied protective coating membrane.



Packing

20L

200L

HOT APPLIED ELASTOMERIC COATING

DUASPHALTUM is a high performance high build hot applied liquid membrane based on polymer modified bitumen. DUASPHALTUM forms a highly elastic film that adheres well to common substrate like concrete, cement blocks and existing roof membrane.



Packing

15kg

ACRYLIC COATING

DUCRYL is a special synthetic resin based waterproofing coating. Because of its flexibility and thixotropic nature it is ideal for use on vertical as well as horizontal surfaces. It is single pack, very economical and pollution free waterproofing coating. Due to its white color, it has excellent solar insulation capacity.



Packing

20KG

SPECIAL PRODUCTS

ALUMINUM FLASHING

DUFLASH ALUMINUM flashing strips are designed and engineered to ensure water tightness in critical roofing applications made from high quality aluminum.



CEMENTITIOUS COATING

DUFLEX is a two-component flexible cementitious coating for water-proofing. It protects concrete structures against water, vapor, ingress of chloride ions, attacks of acidic gases and alkalis. The product is based on cements, graded fine-grain aggregates with special additives and synthetic polymers in water dispersion. Due to the high content of quality synthetic resins Duflex adheres very well to all brick and concrete substrates and it cures to form a tough flexible coating having excellent waterproofing properties.

Packing

15Kg Powder and 5Kg Liquid



CEMENTITIOUS FAIR COAT

DUBUILD FC is a single component polymer modified fairing coat to fill pores, blow holes, etc. on a concrete surface. It can be used as a skim coat prior to the application of protective coatings. This is a shrinkage compensated crack free material which can be applied using thin coats.

Packing

20 kg Bag




FREE FLOW GROUT

Shrinkage compensated free flow grout.

DUGROUT HS is a cementitious non – shrink grout that can be used in different places/applications. It has high adhesion strength, achieves early compressive strength, excellent impermeability, and chemical resistant characteristics.

Packing

25 kg Bag

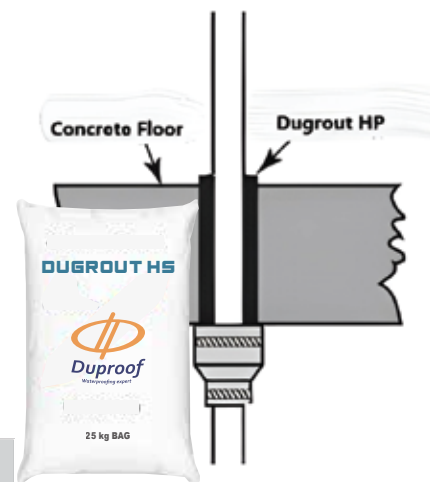

MICRO-CONCRETE

(Flowable, Non-Shrink Micro-Concrete)

DUCRETE MC is a single component non-shrink free flowing cementitious grout. It is a blend of selected cement, graded fillers, and chemical additives. These special additives impart controlled expansion in plastic state at the same time minimize water requirement.

Packing

25 kg Bag



FIBRE REINFORCED REPAIR MORTAR

Fibre Reinforced – Non-Shrink Repair Mortar.

DUCRETE FRM is a single component polymer modified, fibre reinforced non-shrink repair mortar, providing high strength. It contains blends of Portland cement, sand, polyethylene fibre, polymer powder, special fillers, and other special additives.

Packing

25 kg Bag



WATER RESISTANT TILE ADHESIVE

Cementitious High Strength Water Resistant Tile Adhesive.

DUTILE MTA is a cement-based water-resistant tile adhesive for the thin or thick bed fixing of almost all types of tiles, such as ceramic wall and floor tiles, terrazzo, quarry, marbles and sand stones.



Packing

25 kg Bag

POLYMER MODIFIED TILE ADHESIVE

Polymer Modified Cementitious High Strength Water Resistant Tile Adhesive.

DUTILE LM is a high-quality dry set mortar for fixing large format tiles, glass mosaics, ceramic tiles, porcelain tiles, marble, and natural stone.

Recommended for malls, utility areas, and hospital floor, walls & wet areatiles installations.



Packing

20 kg Bag

LATEX MODIFIED TILE ADHESIVE

Water Resistant Latex Modified Tile Adhesive.

DUTILE WR is a Latex modified cementitious flexible waterproof adhesive used for permanent fixing of porcelain tiles, Marble, Mosaics and Natural stone for interior and exterior applications especially in permanent wet areas or submerged conditions. Recommended for Swimming Pools, Fountains, Bathrooms, kitchens, and permanent wet areas.




Packing

20 kg Bag

PVC WATER STOPPER

DUSTOP Waterstops are extruded using the best quality of raw materials in accordance with BS658. The design is such that it allows the easy flow of concrete given that DUSTOP profiles are extremely flexible and have an elongation of > 300%. Our waterstops have been installed in many projects across the Middle East region achieving assured long-term performance even in extreme conditions, resulting in prevention of unwanted water penetration in concrete structures.

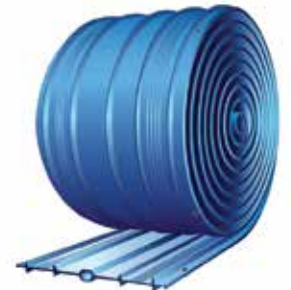

Sizes

150mm, 200mm, 250mm, 300mm X 15m

HYDROPHILIC RUBBER WATERSTOP

DUSWELL HP is made of high-performance modified rubber strips. Interaction between water and hydrophilic groups which are part of the DUSWELL HP molecular structure results in swelling of rubber strips. When in contact with water DUSWELL HP reacts and swells up to 300% of its original dimension to form a compression seal.




Sizes

10 LM / ROLL

DUINJECT HOSE

Re-injectable Grout Hose.

DUINJECT HOSE system is essential for the construction of watertight structures. The joints should be arranged in such a way that crack formation is virtually eliminated.

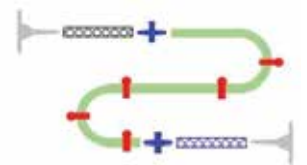

Sizes

100 LM / ROLL

EPOXY GROUTING

DUGROUT EG is a three component solvent free epoxy resin based grouting system for ceramic tiles in hygienic and heavy duty conditions

Packing

6.4 kg Set



EPOXY RESIN ADHESIVE

DUBUILD NF is an epoxy resin adhesive and bedding compound that is designed for use where non-slump characteristics are required. The system consistency makes the product Ideal for minor concrete repairs and re-profiling.

Packing

3 kg kit (two parts)



EPOXY FLOOR COATING

DUPOXY 100 (Solvent Free Epoxy Resin Floor Coating)

DUPOXY 100 is a two component, high Performance, solvent free, epoxy resin floor coating, when cured will form a hard glossy coating with excellent adhesion to concrete and metal surfaces.

Packing

18 Ltr



PILE HEAD EPOXY GROUT

(High Strength Flowable Epoxy Grout for Pile Head Treatment)

DUGROUT EP 102 is a three component, solvent free, pouring grade epoxy grout, specially designed to develop high early and ultimate compressive strengths with low exotherm properties for heavy duty applications. Solvent free non shrink and stainless epoxy grout specially for wide variety of industrial applications.

Packing

30 kg kit (3 parts A,B,C)



Boarding Agent, Curing Compound and Release Agent

MOULD RELEASE AGENT - S

DURELEASE S (Chemical Release Agent, Solvent Based)

DURELEASE S a chemical release agent suitable for mould and shutter faces prior to casting concrete in order to achieve clean release. It can be applied to formwork by spray in the form of light uniform coating.

Packing

200 Ltr



MOULD RELEASE AGENT - WB

Water based chemical mould release agent.

DURELEASE WB an emulsified blend of mineral oils and nonhazardous chemicals is specially formulated to produce release properties which are superior to those of conventional mould oils. DURELEASE WB is supplied as a sprayable white liquid, ready for direct application on site.

Packing

200 Ltr



PVA BONDING AGENT

DUBOND PVA is a Polyvinyl Acetate, single component polymerized resin emulsion. It bonds with almost all building materials except PVC, rubber, and polyethylene

Packing

200 Ltr



SBR BONDING AGENT

Styrene Butadiene Rubber Latex Emulsion.

DUBOND SBR is a modified Styrene Butadiene rubberized emulsion, which is supplied as a ready to use admixture/bonding agent in liquid form. It is designed to improve the quality of site-batched cementitious mortars and slurries. When used with cement, this acts as water resistant, improving durability and strength.

Packing

200 Ltr



DUCURE WB

Water Based Curing Compound.

DUCURE WB is a water based curing compound with a daylight reflectance and high curing efficiency even in high temperature conditions. When after the application it forms a uniform film on concrete surface. The cured film prevents the hydration of concrete and retains the moisture within the concrete. The formed film acts as a primer for any subsequent paints or any surface finishes. **DUCURE WB** will not affect bonding of any finishes. No need to be removed prior to any surface finishes.

Packing

200 Ltr



POLYURETHANE

DUPURETHANE is a single component; cold applied, aliphatic polyurethane modified waterproof coating with high elasticity, durability & flexibility. It has a high level of resistance to weathering agents like UV rays, sunlight, frost, rainfall etc.



Packing

20L

MASTIC SEALANT

DUMASTIC is a superior quality, single component, cold applied ready to use elastomer sealant based on polymer modified bitumen in high quality hydrocarbon solvent. The product displays excellent adhesion to the concrete, brickwork, asphalt etc.



Packing

20 kg

POLYSULFIDE SEALANT PS PG

Two component Polysulfide construction / Expansion joint sealant.

DUFLEX PS is a two-component polysulphide sealant which, when mixed cures to form an elastic rubber. It gives excellent adhesion to glass, metal, concrete, masonry, wood, and plastic. It's capable of withstanding repeated extension and compression without any loss of adhesion. It gives outstanding resistance to deterioration by weathering, oils, fuel, water, UV exposure, ozone etc. and remains unaffected by most alkalis and dilutes acids.



Packing

4 LTR (POURING GRADE)

POLYSULFIDE SEALANT PS GG

Two component Polysulfide construction / Expansion joint sealant.

DUFLEX PS is a two-component polysulphide sealant which, when mixed cures to form an elastic rubber. It gives excellent adhesion to glass, metal, concrete, masonry, wood, and plastic. It's capable of withstanding repeated extension and compression without any loss of adhesion. It gives outstanding resistance to deterioration by weathering, oils, fuel, water, UV exposure, ozone etc. and remains unaffected by most alkalis and dilutes acids.



Packing

2.5 LTR (GUN GRADE)

DUFIBREBOARD

DUFIBREBOARD is the joint filler board Processed with cane fiber and impregnated with different percentages of the Bitumen. It is the environmentally friendly product compared with plastic joint filler and made available in different range of thickness and sizes. The product's compression and expansion characteristics conforms to UK and USA standards.



Thickness

10mm, 12mm, 18mm, 25mm

MEGA PROJECTS

meydan

Meydan Racecourse
(Nad Al Sheba)



DAMAC

Merano Tower
Business Bay



Arabian Ranches
324 villas



NAKHEEL
Jumaira
Shoreline Apartment



DUPROOF MEGA PROJECTS



Emirates
Head Quarter



مطارات دبي
DUBAI AIRPORTS

Royal Jet
Terminal



الاتحاد للقطارات
ETIHAD RAIL



Al Reem Island
Development



DUPROOF MEGA PROJECTS

MEGA PROJECTS





Member of SN Registrars (Holdings) Ltd



8327

+971 4 885 1212

duproof@emirates.net.ae

www.duproof.ae

P.O. Box 74334, Dubai, United Arab Emirates